TECHNICAL DATASHEET

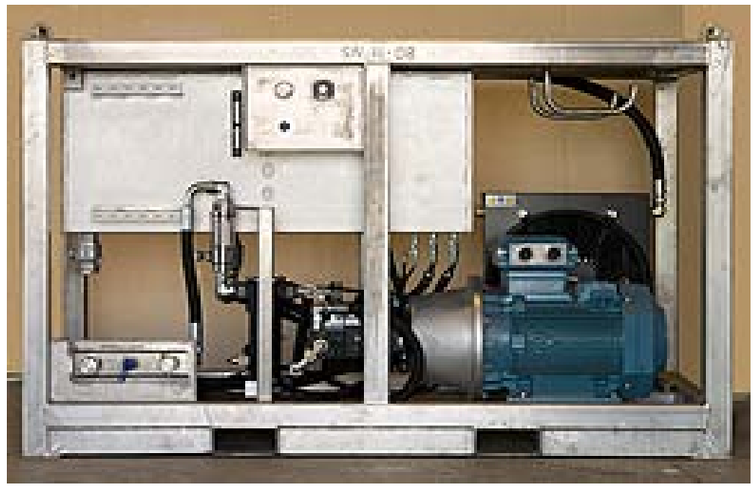

HPU (id.no.) **SN 11-08**

SAFE SUPPLY AS
www.safe-supply.no

ATEX - certified	Yes
CE marked	Yes
According to Zone	2
According to NORSOK	+40 to -20degr C
Frame (LxBxH-mm)	2000x1460x2350
Certification	DNV 2.7-1
Truck pockets	yes
Tank volum (liter)	800
Weight (kg)	2000
Dimmentions (LxWxH)mm'	3200x1250x1900 (1800)
Pump	Parker PV180
Pump varabel flow	Axiel pump
Max flow	265 lit/min (125bar)
Max pressure	350 bar (65 liter)
Motor effect	55 kW
Motor zone	Zone 1 - Multivoltage
Motor voltage	690 Volt
Motor period	50 Hz
Motor currant (maks load)	63 Amp
Motor rpm	1450
Cooling fan	Zone 1
Cooling fan	Hydr. driven
Safety-overflow-valve	To tank
EX control panel	Zone 1
EX capsle	Zone 1
Outlet couplig	5558 02 20-NV Han 5/4'
Retur coupling	5558 80 47-CVV Han 6/4
Drain	5558 02 16-NV Han 1"

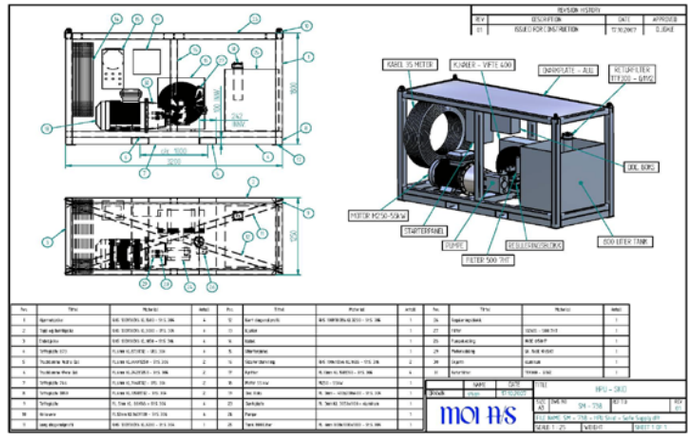

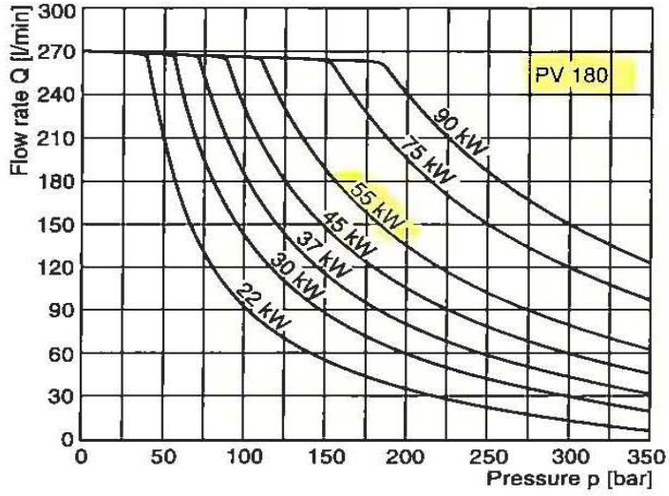

solutions